

**SPRO**<sup>®</sup>**IP**



# DHIPD40/2713RV-G

4 MEGAPIXEL IP VANDAL RESISTANT IR DOME CAMERA



4 MEGAPIXEL



2.7-13 MM



30m IR



VANDAL PROOF



IP66



## Key Features:

- 4 Megapixel progressive CMOS
- H.264 & MJPEG dual-stream encoding
- 4M@25fps(2688×1520)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer & CMS(SPRO CSS)
- 2.7~13mm varifocal lens
- Max IR LEDs Length 30m
- IP66 waterproof and IK10 vandal resistance
- DC12V/POE

## SPECIFICATIONS

<b>Model Number</b>	DHIPD40/2713RV-G
<b>Image Sensor</b>	1/3" 4Megapixel progressive scan CMOS
<b>Effective Pixels</b>	2688(H)x1520(V)
<b>Scanning System</b>	Progressive
<b>Electronic Shutter Speed</b>	Auto/Manual, 1/3(4)~1/100000s
<b>Min. Illumination</b>	0.1Lux/F1.4(Color), 0Lux/F1.4(IR on)
<b>S/N Ratio</b>	More than 50dB
<b>Video Output</b>	N/A
<b>Camera Features</b>	
<b>Max. IR LEDs Length</b>	30m

(continued)

(continued)

<b>Day/Night</b>	Auto(ICR)/Color/B/W
<b>Backlight Compensation</b>	BLC / HLC / DWDR
<b>White Balance</b>	Auto/Manual
<b>Gain Control</b>	Auto/Manual
<b>Noise Reduction</b>	3D
<b>Privacy Masking</b>	Up to 4 areas

#### Lens

<b>Focal Length</b>	2.7mm~13.5mm
<b>Max Aperture</b>	F1.4
<b>Focus Control</b>	Auto
<b>Angle of View</b>	H: 92°~28°

#### Video

<b>Compression</b>	H.264/ H.264H/ MJPEG	
<b>Resolution</b>	4M(2688×1520)/3M(2304×1296)/1080P(1920×1080)/1.3M(1280×960) 720P(1280×720)/D1(704×576/704×480)/VGA(640×480)/CIF(352×288/352×240)	
<b>Frame Rate</b>	Main Stream	4M(1 ~ 20fps)/1080P (1 ~ 25fps)
	Sub Stream	D1/CIF(1 ~ 25fps)
<b>Bit Rate</b>	H.264H: 40K ~ 8192Kbps	

#### Audio

<b>Compression</b>	N/A
<b>Interface</b>	N/A

#### Network


<b>Ethernet</b>	RJ-45 (10/100Base-T)
<b>Wi-Fi</b>	N/A
<b>Protocol</b>	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
<b>Compatibility</b>	ONVIF 2.4
<b>Max. User Access</b>	20 users
<b>Smart Phone</b>	iPhone, iPad & Android

#### Auxiliary Interface

<b>Memory Slot</b>	N/A
<b>RS485</b>	N/A

(continued)

<b>Alarm</b>	N/A
<b>PIR Sensor Range</b>	N/A
<b>General</b>	
<b>Power Supply</b>	DC12V, POE (802.3af)
<b>Power Consumption</b>	<5.5W
<b>Working Environment</b>	-30°C~+60°C, Less than 95% RH
<b>Ingress Protection</b>	IP66
<b>Vandal Resistance</b>	IK10
<b>Dimensions</b>	Ø122mm X 89mm
<b>Weight</b>	0.5Kg

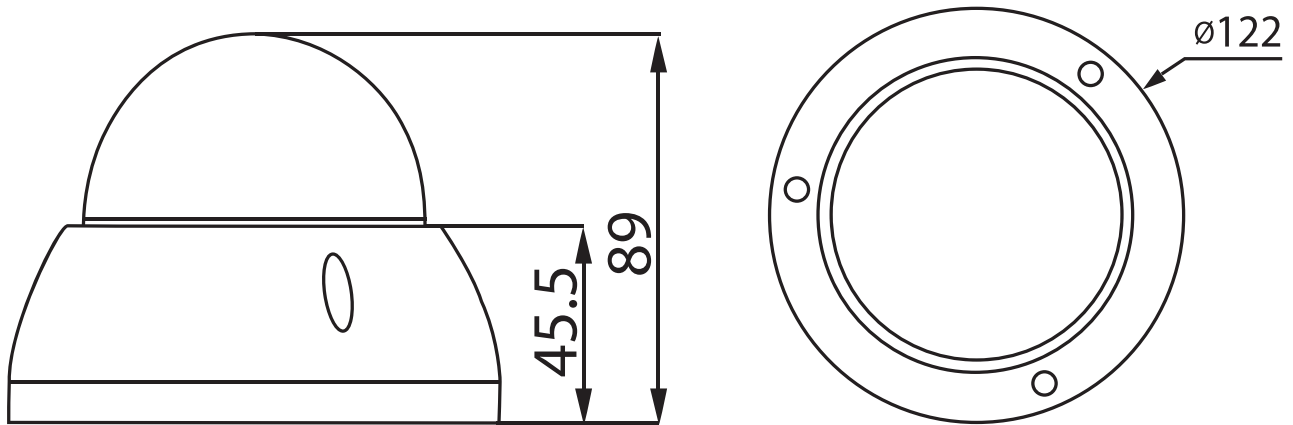

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved