

EXELL

EXIPQ50/2812R/30M

5 Megapixel IP IR Bullet Camera



Key Features:

- 5 Megapixel @ 15fps(2592×1944)
- 2.8~12mm vari-focal lens
- WDR, Day/Night(ICR), DNR, AWB, AGC, BLC
- Up to 30m IR distance, Smart IR
- IP66
- ONVIF
- DC12V/POE

SPECIFICATIONS

Model Number	EXIPQ50/2812R/30M
Image Sensor	5 Megapixel CMOS
Effective Pixels	2592(H) X 1944(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)s~1/30000s
Min. Illumination	0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
Camera Features	
Max. IR LEDs Length	30m
Day/Night	Auto(ICR)/Color/B/W
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	YES
Lens	
Focal Length	2.8~12mm
Max Aperture	F2.1(F2.0)

(continued)

Focus Control Manual

Video

Compression H.264/ H.264H/ H.264B/ MJPEG

Resolution 5MP (2592x1944)/4MP/3MP/2MP/720P

Frame Rate	Main Stream	5MP(1~15fps)
	Sub Stream	D1(1 ~ 25fps)

Bit Rate H.264: 36kbps ~ 10240kbps

Audio

Compression N/A

Interface N/A

Network

Ethernet RJ-45 (10/100Base-T)

Wi-Fi N/A

Protocol IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS

Compatibility ONVIF

Auxiliary Interface

Memory Slot N/A

RS485 N/A

General

Power Supply DC12V/PoE (802.3af)


Working Environment -30°C~+60°C, Less than 95% RH

Ingress Protection IP66

Vandal Resistance N/A

Dimensions 231×84×110mm(9.1" ×3.3"×4.3")

Weight 820g (28.92oz.)

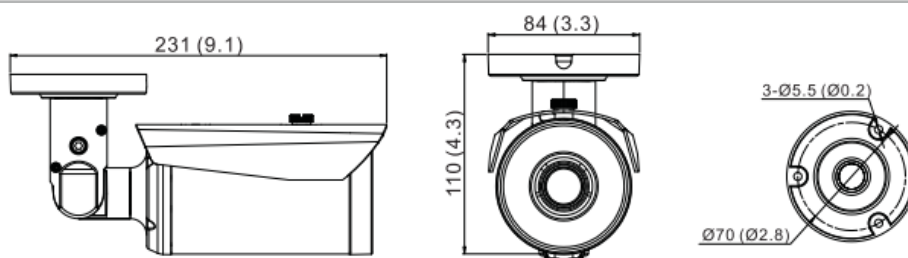

All specifications are subject to change without notice. Copyright © Luxrite Ltd. All rights reserved