

S PRO SEVEN



DHDVR04-SEVEN

5 Channel 3 in 1 HDCVI DVR (Analogue/HDCVI/IP)

No Port Forwarding Required for Smart Phone/Windows PC/Apple Mac Viewing



5 CHANNELS



HDMI



VGA



PTZ CONTROL



H.264



IPHONE & ANDROID
PHONE VIEWING



APPLE MAC
VIEWING




USB BACKUP

HDCVI

Key Features:

- 5 channel recording (4 channel HDCVI + 1 channel 2MP IP).
- Analogue & 720P or analogue & 1080N (plug & play) universal recording on BNC inputs.
- P2P (no port forwarding required) - Apple app/Android app/Windows PC/Apple Mac PC
- 800TVL@25fps, 720P/1080N@12fps
- IP channel : 2MP realtime recording (25fps)
- 1/4 channel playback
- ONVIF 2.4 compatible : Dahua, Hikvision, Arecont Vision, AXIS, Bosch, Brickcom, Canon, Honeywell, Panasonic, Pelco, Samsung, Sony, Vivotek and etc.
- Spot monitoring via network
- PTZ control over 1 co-ax cable (mouse control on DVR - area zoom & scroll zoom)
- Instant playback on one channel when others are on live viewing
- Smart search & email notification (snapshot)
- Backup footage by video clip while viewing playback

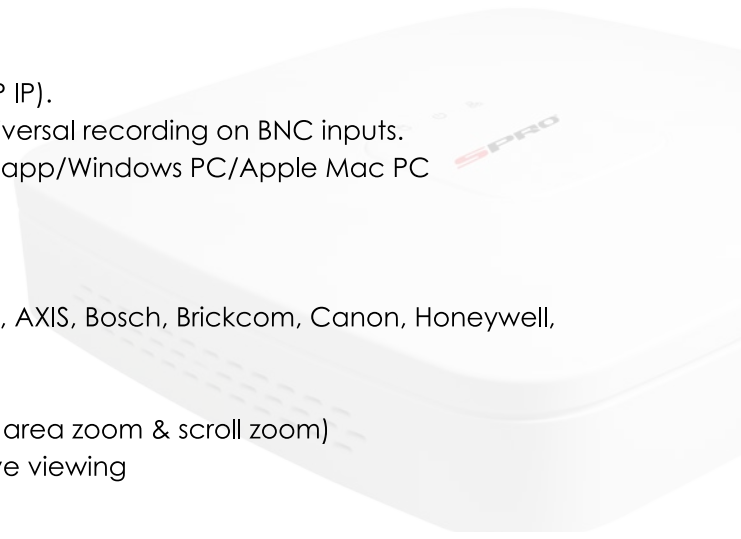

SPECIFICATIONS

Model Number	DHDVR04-SEVEN
Main Processor	Embedded processor
Operating System	Embedded LINUX

Video

Input	5 channel (4 x HDCVI + 1 x IP)	
Standard	Analogue + HDCVI	4 channel Analogue/HDCVI Camera
	IP	1 channel (up to 2 Megapixel IP)

(continued)

Audio		
Input	1 channel, RCA	
Output	1 channel, RCA	
Two-way Talk	Reuse audio input/output channel 1	
Display		
Interface	1 x HDMI, 1 x VGA	
Resolution	960×1080, 1280×1024, 1280×720, 1024×768	
Display Split	1/4/6	
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Video/Audio Compression	H.264/G.711	
Resolution	1080N(960*1080)/720P(1280×720)/960H(960×576/960×480)/ D1(704×576/704×480)/HD1(352×576/352×480)/BCIF(704×288/704×240) CIF(352×288/352×240) / QCIF(176×144/176×120)	
Record Rate	Main Stream	1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF(1~25/30fps)
	Extra Stream	CIF/QCIF(1~15fps)
Bit Rate	1~4096Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval	1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup		
Sync Playback	1/4	
Search Mode	Time/Date, MD & Exact search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Internal SATA burner/Network	

Network

Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access	128 users
Smart Phone	iPhone, iPad & Android

Storage

Internal HDD	1 SATA port, up to 4TB
---------------------	------------------------

Auxiliary Interface

USB Interface	2 ports(2 Rear), USB2.0
----------------------	-------------------------

General

Power Supply	DC12V/2A
Power Consumption	10W (without HDD)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimensions	Smart 1U, 205mm × 205mm × 40mm
Weight	1.1 KG(without HDD)

